

## [ Products ] you can identify with



### Physical Specifications

<b>Material</b>	Synthetic Label
<b>Size</b>	50.0 x 12.5 x 1.35 mm 1.97 x 0.49 x 0.05 in
<b>Weight (g)</b>	0.50
<b>Attachment</b>	Self-adhesive suitable for curved surfaces to a minimum radius of 58mm

### Dimensions



Measurements shown in mm

## IQ 350


Omni-ID's IQ 350 labels provide on metal tag functionality, within a small, low profile, easy to deploy label. With the smallest size to performance ratio in the market, the IQ 350 also boasts a wide read performance making this an ideal choice for portal applications. Optimized for thermal barcode printers, the IQ 350 enables low cost, hassle-free RFID deployment.

### RF Specification

<b>Radio Protocol</b>	EPC Class 1 Gen2v2
<b>Frequency Range</b>	866 – 868 MHz (EU) 902 – 928 MHz (US)
<b>Read Range – Fixed Reader</b>	Up to 3.8m (12.5 feet)
<b>Read Range – Handheld Reader</b>	Up to 2m (6.5 feet)
<b>On Metal or Balanced</b>	Optimized for metal
<b>Material Compatibility</b>	Metal
<b>IC Type (Chip)</b>	Impinj-M730
<b>Memory</b>	EPC - 128 bits User - 0 bits Unique TID - 48 bits

Quoted performance achieved using standard testing methodology on Aluminium test plates. Read range is dependent on multiple factors such as; RFID reader transmit power and receiver sensitivity, asset material and environment. Please see the Omni-ID On Metal Labels User Guide for more detail. EPC and User memory are reprogrammable. UTID is locked at point of manufacture by IC manufacturer.

### Radiation Patterns

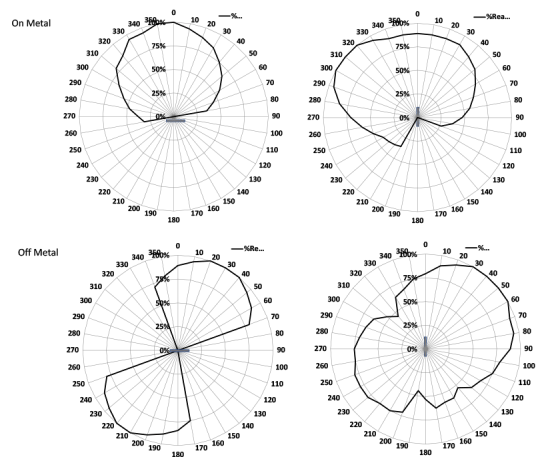

## [ Products ] you can identify with



With a thin profile and label presentation, Omni-ID's IQ 350 labels are ideal for on-metal applications such as:

- IT, office, hospital and laboratory asset tracking
- Logistics involving metallic packaging
- Intermodal logistics

### Certifications

CE, RoHS



### Environmental Specifications

<b>Operating Temperature</b>	-40°C to +85°C
<b>Max Temperature Exposure</b>	-40°C to +85°C
<b>Application Temperature</b>	+18°C to +35°C
<b>IP Rating</b>	IP68
<b>Shock &amp; Vibration Tolerance</b>	MIL-STD-810 G
<b>Printer Compatibility</b>	SATO, Zebra

### Ordering Information

<b>Warranty</b>	1 year	
<b>Part Number / Order Codes / Order Numbers</b>	CP15712- EU CP15711-US	
<b>Supply Format</b>	900 labels per roll	
<b>Minimum Order Quantity</b>	Overlamination	10,800 labels (12 rolls)
	Customization	10,800 labels (12 rolls)
	Service Bureau	900 labels (1 roll)
	Standard label	900 labels (1 roll)

株式会社サイレンスネット [www.silencenet.com](http://www.silencenet.com)  
〒222-0033 横浜市港北区新横浜2-5-9 新横浜フジカビル  
tel.045-475-1555 fax.045-475-3275

For product or technology inquiries email: [sales@omni-id.com](mailto:sales@omni-id.com).  
Visit [omni-id.com](http://omni-id.com) to learn more about the complete line of **Omni-ID RFID** products