



Intermec


Product Profile

- Ultra-compact size yet extremely durable
- First bi-linear CMOS sensor using APS technology
- 617nm highly visible aiming
- 200 scans per second
- 3.3 V low power operation preserves battery life
- Provides safe scanning

Combining compact size (5.2cm³/0.32in³) and exceptional scanning performance, the EV10 High Performance APS Scan Engine from Intermec is the first bi-linear CMOS sensor using state-of-the-art Active Pixel Sensor (APS) technology. The EV10 is ideal for OEM applications where space is limited for scanner integration in both portable and fixed devices, including hand held terminals, PDAs, PC and cell phone peripherals, lottery terminals, time and attendance terminals, ski-pass, automated sorting machines and many more.

Intermec's advanced research in scanning technology has resulted in an APS sensor that is bi-linear, utilizing multiple scanning lines and combining high-density, standard range and PDF 417 bar code reading into one engine delivering unparalleled flexibility and performance. The EV10 has a very high scan rate and a large depth of field enabling it to read even the most elusive bar codes including poorly printed, damaged, low contrast, wide or high density. In addition, the EV10 can be used in any lighting conditions from total darkness to full sunlight.

The EV10 uses a unique 617nm illumination system to provide a safe, bright and sharp aiming line. With the EV10, you can

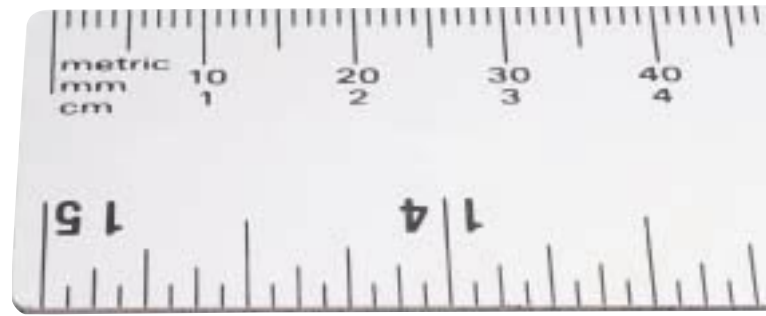


EV10 HIGH PERFORMANCE APS SCAN ENGINE

clearly see what you are scanning, even in brightly lit or backlit conditions, thus improving usability and throughput.

The EV10 provides easy electrical connection to your OEM hardware without having to add extra components to your main board. The 3.3V low power operation is ideal for preserving battery life in mobile applications. Additionally, the standby current is reduced to micro amps to preserve the host device battery when the scan engine is not in use.

With no moving parts and no laser diode, the EV10 has a longer life than any laser scanner (MTBF above 250Kh). It's rugged design means it can withstand 2000G shocks and 50G vibrations and can be used in a wide temperature range.

Small volume and low power, the EV10 uses an industry standard interface and connector. Everything has been done to simplify the mechanical and electronic integration of the EV10 into your OEM design. The EV10 is the most flexible and durable scan engine on the market. By choosing the EV10, you will protect your investment for future scanning requirements and minimize service repair issues.

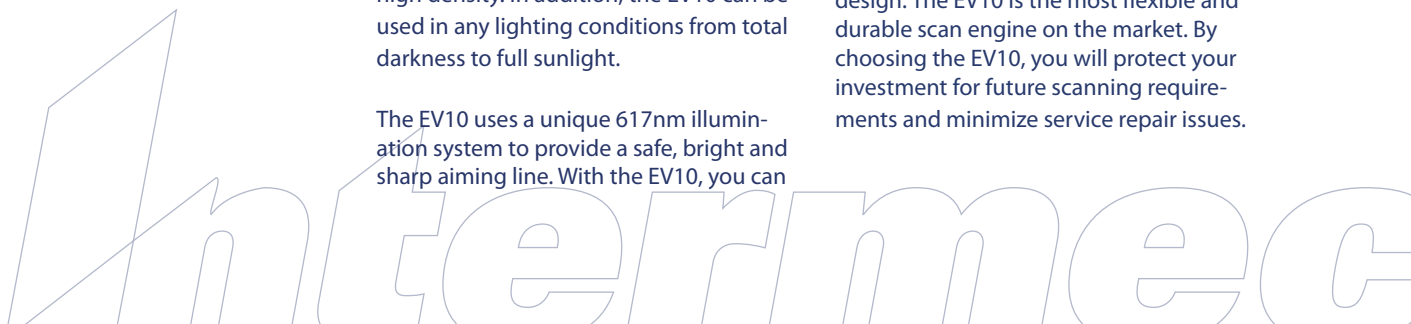

Intermec

Physical Characteristics**Dimensions:**

0.45" H x 0.89" D x 0.81" W

11.4mm H x 22.5mm D x 20.6mm W

Weight: 12g**Scanning Performance****Light source:**

617nm Highly Visible LED

Scan rate:

High speed mode = 200 scans/s

Low speed mode = 34 scans/s

Scan angle: 40°**Print Contrast:** down to 25%**Min x. dimension:** 0.1mm (4mils)**Reading distance:** up to 50cm**Interfaces**

10 pin ZIF connector

Undecoded industry standard

output (DBP)

SE900 compatible ribbon cable

Power**Voltage:** 3.1 to 3.5V**Current:**-110mA typ @ 34 scans/s

-130mA typ @ 200 scans/s

Standby current: 50 µA**Environmental Characteristics****Operating temperature:**

-22° to 122°F (-30°C to 50°C)

Storage temperature:

-40° to 178°F (-40°C to 70°C)

Relative humidity:

5 to 95% (non-condensing)

Shock: 2.000G**Vibration:** 5 – 200Hz: 8G 3 axis**Ambient light:** works in any lighting

condition from 0 to 100000 lux

Regulatory Approvals

UL, cUL recognized component,

VDE certified

Class 1 LED product; SELV according to

EN60950-1

Accessories

Demo kit



Intermec[®]
e x p e c t **MORE**[™]

North America

Corporate Headquarters
6001 36th Avenue West
Everett, Washington 98203
tel: 425.348.2600
fax: 425.355.9551

Systems & Solutions

550 2nd Street S.E.
Cedar Rapids, Iowa 52401
tel: 319.369.3100
fax: 319.369.3453

Media Supplies

9290 Le Saint Drive
Fairfield, Ohio 45014
tel: 513.874.5882
fax: 513.874.8487

Canada

7065 Tranmere Drive
Mississauga, Ontario
L5S 1M2 Canada
tel: 905.673.9333
fax: 905.673.3974

Europe/**Middle East & Africa
Headquarters**

Sovereign House
Vastern Road
Reading RG1 8BT
United Kingdom
tel: 44.118.987.9400
fax: 44.118.987.9401

Asia

Asia Regional Office
26-16 International Plaza
10 Anson Road
Singapore 079903
tel: 65.6324.8391
fax: 65.6324.8393

Intermec International, Inc.

14 Floor, IBM-Pacific Century Place
2A Workers Stadium
Chaoyang District, Beijing 100027
P.R. China
Tel: +86 (010).6539 1012
Fax: +86 (010).6539 1025

Australia

Level 7, 200 Pacific Highway
Crows Nest, NSW 2065
Australia
tel: 61.2.9492.4400
fax: 61.2.9954.6300

South America & Mexico

Intermec South America Ltda.
Rua Arandu 1544-15 andar
Edificio Itavera
Brooklin Novo 04562-031
Sao Paulo, SP
Brazil
tel: 55.11.5501.2070

Intermec Technologies de Mexico

Av Tamaulipas #141, Primer Piso
Col. Hipodromo Condesa
Mexico, DF, 06140 Mexico
tel: 525.55.211.1919
fax: 525.55.211.8121

Worldwide**Fax Document**

Retrieval Service
800.755.5505
(North America Only)
tel: 650.556.8447

Internet

www.intermec.com

Sales

800.347.2636
(toll free in N.A.)
tel: 425.348.2726

Service and Support

800.755.5505
(toll free in N.A.)
tel: 425.356.1799

Copyright © 2004 Intermec Technologies Corporation. All rights reserved. Intermec is a registered trademark of Intermec Technologies Corporation. All other trademarks are the property of their respective owners. Printed in the U.S.A. 611237-01A 02/04

In a continuing effort to improve our products, Intermec Technologies Corporation reserves the right to change specifications and features without prior notice.